


D A T A S H E E T

AV-PRO™ RW500 REWIND

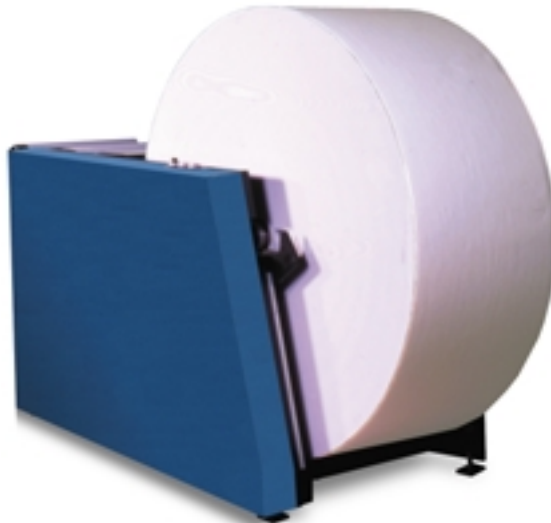

DESCRIPTION

The rewind stand is a self-powered and self tension 50" center driven Jumbo Rewind, supporting webs up to 20.5" wide and is capable of controlled speeds up to 500fpm*. Standard with the unit is a 3" or 70mm air core shaft, web splicing device, pneumatic roll lift and load cells with tension adjustment for precision speed control and finite tension. Web direction left to right or right to left.

BASIC FEATURES:

- Production speed: 500fpm*
- Max. 50" diameter rewind
- Run and tension controls
- Pneumatic roll lift
- Electronic tension adjustment
- Manual web splicing device
- 5 HP core shaft drive
- Max. 20.5" web wide
- Web break sensor
- 3" or 70mm diameter air core shaft
- Adjustable roll sensor with stop
- Automatic web tension reduction
- Over winding capability only

**Actual run speed may vary depending on paper roll conditions, cross perforations, and other operating conditions.*

OPTIONS:

- 20.5" wide web guide module
- Casters for portability
- 5", 6" or 150mm diameter air core shaft

Technical specifications subject to change.

FORM NUMBER AV-PRO RW500 - 5/03

Form Flo 
Equipment Manufacturers

3154 N. 34th Dr. * Phoenix, AZ 85017

Phone: 602.272.3200 * FAX: 602.272.3509

© Copyright 1999 Form Flo Equipment Manufacturers, Inc.