


D A T A S H E E T

AV-PRO™ UW500 UNWIND

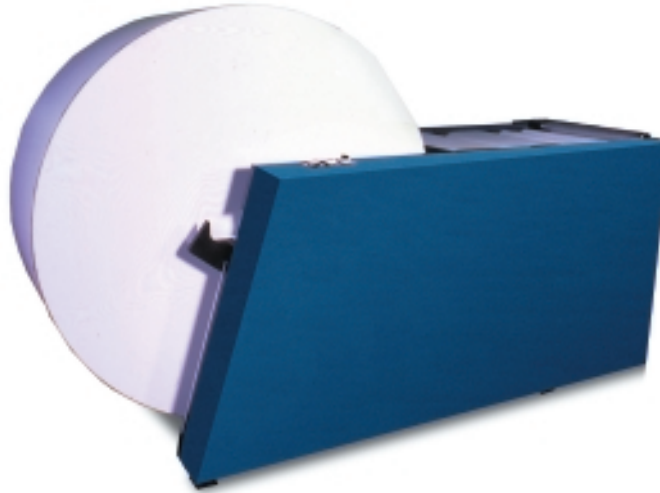

DESCRIPTION

The unwind stand UW500 is a 50" Unwinder, supporting webs up to 20.5" wide and is capable of controlled speeds up to 500 fpm. Standard with the unit is a 3" or 70mm air core shaft, pneumatic roll lift, web splicing device, Horton electronics for precision speed control and a heavy duty precision disc brake. Web direction left to right or right to left. Loose or tight web applications.

BASIC FEATURES:

- Production speed 500 fpm
- Max. 50" diameter unwind
- Web break sensor
- Pneumatic roll lift
- Pneumatic disc braking
- Under and over winding capability
- Min web width 6"
- Max. web width 20.5"
- 1/4" sidelay adjustment for roll
- 3" or 70mm diameter air core shaft
- Adjustable roll sensor with stop
- Manual web splicing device

OPTIONS:

- Mechanical decurl bar
- 20.5" wide web guide module for tight web applications
- Casters for portability

Technical specifications subject to change.

FORM NUMBER AV-PRO UW500-5/03

Form Flo 
Equipment Manufacturers